



WHITES[®] RURAL

Posts • Fencing • Gates • Tools



Farm Fencing

2025 Rural Catalogue | whitesrural.com.au



POSTS



FENCING



GATES



TOOLS

Australian family owned, down to earth, no nonsense

Whites Rural is Whites' specialist rural arm signifying a deep and long-term commitment to the fencing needs of rural Australia.

For 50 years, Whites has proudly been a 100% Australian owned and operated family business with its roots strongly embedded in steel, wire and fencing products.

Our long history of continuous improvement has yielded many new and unique product offerings, like Stockpost Ute Pack, always striving to provide greater value to farmers and fencing contractors in the rural market.

Most recently, Whites has introduced the Murray range – the new name in Australian-made fencing. Our manufacturing facility in Albury NSW, has state-of-the-art equipment and over 70 years' experience in producing rural fencing products.

For the most up to date pricing and for warehouse locations please visit the Whites Group portal



PORTAL

To find out more about the products and stay in touch, scan for our Whites Rural website and Facebook.



WEBSITE



FACEBOOK

FARM FENCING

Rural Catalogue



STOCKPOST Fence Posts

Stockpost	4-5
Stockpost Ute Pack	4-5
Stockpost XL	4-5
Stock-X	6
Stockpost End Assembly	7
Brace Kit	7

MURRAY

Hinged Joint Farm Fencing	9
Fence Wire, Trellis Wire	10
Barbed Wire, Barbless Safe-Twist	11
Stiff Stay & 2mm Stiff Stay Farm Fencing	12
Stiff Stay Exclusion Fencing	13
Horse Fencing	14
Titan Rail	15
Sheep Yard Mesh, Tree Guards	16

WHITES RURAL

I-Stay Gates, Bar Gates, Pedestrian Gate	17
N-Stay Gates	18
Gate Fittings	19-20
Rural Netting	21
Farm Mesh, Dog Mesh	22
Fence Wire, Droppers, Farmlite	23
Drivers, Lifters, Spinners	24
Straining Tools	25
Stapling, Stockade	26-27
Fastening Tools, Stockade, Jambro	28
Wire Joiners & Tensioners	29
Farm Pak Wire, Fencing Accessories, RIGI-Floor	30
Pliers and Cutters	31

IMPROVED DUCTILITY

Consistent strength and flexibility without compromising in-field performance



COATINGS THAT LAST

Oven-baked bituminous black barrier
Hot-dipped galvanised to Australian Standard

RIGHT WEIGHT

A true heavyweight post featuring high-grade steel for strength and longevity



Code	Product	Size (ft)	Sling Qty	Weight (each)	Coating
STOCKPOST® - BLACK BITUMINOUS					
10804	135cm STOCKPOST	4'6"	400	2.6kg	Black
10807	150cm STOCKPOST	5'	400	2.8kg	Black
10805	165cm STOCKPOST	5'6"	400	3.1kg	Black
10806	180cm STOCKPOST	6'	400	3.4kg	Black
10809	210cm STOCKPOST	7'	200	4.0kg	Black
10808	240cm STOCKPOST	8'	200	4.6kg	Black
STOCKPOST® - HOT-DIPPED GALVANISED					
10814	135cm STOCKPOST	4'6"	200	2.6kg	Galv
10817	150cm STOCKPOST	5'	200	2.8kg	Galv
10815	165cm STOCKPOST	5'6"	200	3.1kg	Galv
10816	180cm STOCKPOST	6'	200	3.4kg	Galv
10819	210cm STOCKPOST	7'	200	4.0kg	Galv
10818	240cm STOCKPOST	8'	200	4.6kg	Galv
STOCKPOST® UTE PACK - BLACK BITUMINOUS					
10801	165cm STOCKPOST UTE PACK	5'6"	200	3.1kg	Black
10802	180cm STOCKPOST UTE PACK	6'	200	3.4kg	Black
STOCKPOST® UTE PACK - HOT DIPPED GALVANISED					
10811	165cm STOCKPOST UTE PACK	5'6"	200	3.1kg	Galv
10812	180cm STOCKPOST UTE PACK	6'	200	3.4kg	Galv
STOCKPOST® XL - BLACK BITUMINOUS					
10846	180cm STOCKPOST XL	6'	50	6.3kg	Black
10849	210cm STOCKPOST XL	7'	50	7.4kg	Black
10848	240cm STOCKPOST XL	8'	50	8.4kg	Black
STOCKPOST® XL - HOT-DIPPED GALVANISED					
10856	180cm STOCKPOST XL	6'	50	6.3kg	Galv
10859	210cm STOCKPOST XL	7'	50	7.4kg	Galv
10858	240cm STOCKPOST XL	8'	50	8.4kg	Galv

STOCKPOST[®]



LIFETIME GUARANTEE


Stockpost's combination of high-grade ductile steel, proprietary bituminous black & hot-dipped galvanised coatings allow us to offer you a Lifetime Guarantee on every Stockpost fence post sold.

We are so confident in the quality of Stockpost fence posts in livestock and cropping fencing applications that we guarantee Stockposts for a lifetime.

This guarantee covers the Stockpost, Stockpost Ute Pack and Stockpost XL fence post ranges against breaking during installation and normal use for the life of the product.

For full terms and conditions, visit stockpost.com.au/lifetimetcs

Hole Spacing

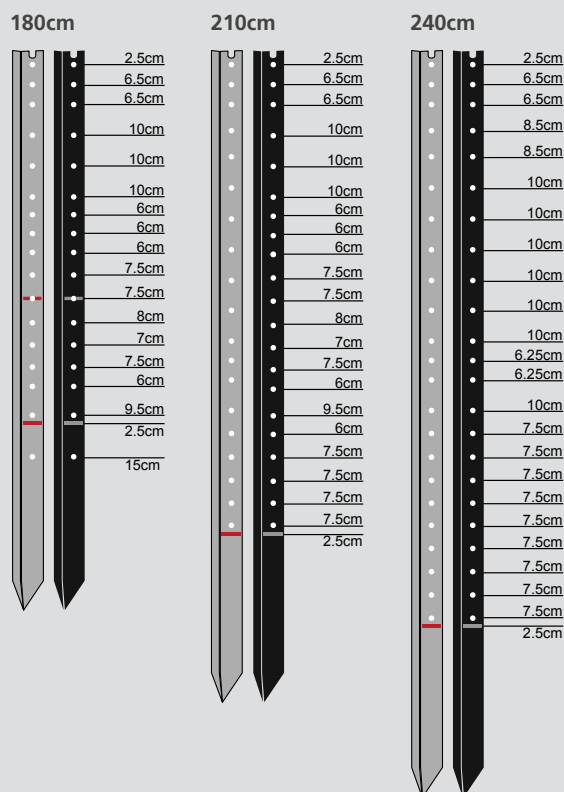

STOCKPOST®

Stockpost, Stockpost Ute Pack and Stockpost XL are premium fence posts – trusted, tried and true. Our Lifetime Guarantee is your assurance. Specifically designed with:

- Reformulated billet steel for greater ductility without mitigating strength
- Proprietary bituminous black coating providing a tough barrier against corrosion - it's not just paint
- Hot-dipped galvanised coating that meets the Australian Standard
- 1.9kg/m weight - a true heavy-weight fence post made from high-grade steel



STOCKPOST® UTE PACK®

Stockpost Ute Pack is Australian designed and patented and provides a faster fencing alternative to traditional slings. 200 Stockposts in a secure steel cradle... and no tie wires!

- Effortless Handling
 - packed as singles, no bundle to untie
- Easy Load Pack
 - front-end loader and ute - friendly size
- Refastenable Pack
 - use some or all, posts stay secure



STOCKPOST® XL

Stockpost XL is an intermediate post weighing in at 3.5kg/m and hot-rolled from the high grade Stockpost steel.

Featuring:

- 3 equal fins for all around stability
- More holes per post - ideal for feral fencing
- Easy to drive, heavyweight alternative to timber posts
- Packed in a faster fencing Ute Pack sling
- Supplied in packs of 50 (4:1 ratio – 200 Stockposts plus 50 Stockpost XLs provide a typical fencing ratio)





Code	Product	Size (ft)	Sling Qty	Weight (each)	Coating
STOCK-X - BLACK BITUMINOUS					
10885	165cm STOCK-X Post	5'6"	400	2.8kg	Black
10886	180cm STOCK-X Post	6'	400	3.1kg	Black

STOCK-X[®]

STOCK-X[®]


The latest addition to the Stockpost Family.
For cropping and light grazing.

Mid-weight, economical post for multiple applications. Featuring high-grade steel for improved strength and ductility. Available in black bituminous coating providing a tough outer barrier.

Spacing Chart



Medium Weight

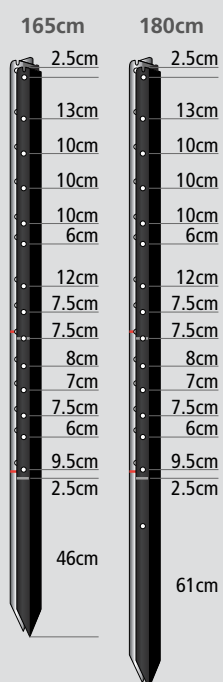

STOCKPOST® END ASSEMBLY

An end assembly system featuring two post types and a fully hot-dipped galvanised Stay Assembly Kit. Made to Stockpost's strict specifications.

Square Anchor Post:

Fully hot-dipped galvanised with shark-tooth design end, to cut through soil for effortless driving.

Round Strainer Post:

Galvanised for a longer life.

Both posts feature Stockpost's unique ground mark, pre-drilled holes and heavy duty wall thicknesses.



**fireproof
base plate**



**innovative
ground mark**



**pre-drilled holes &
multiple configurations**



**heavy duty
brace cap**



**clever edges to
avoid compaction**



Code	Product	Pack Qty	Weight (each)
STOCKPOST® - END ASSEMBLY SYSTEM			
10880	STOCKPOST Round Strainer Post 2.1m	5	11kg
10870	STOCKPOST Anchor Post 2.1m	5	21kg
10875	STOCKPOST Stay Assembly 3m	5	17.1kg
STOCKPOST® - END ASSEMBLY ACCESSORIES			
10878	End Assembly Brace Kit Pack 4	4	32.8kg
13855	End Assembly Gate Fitting Top Strap & Gudgeon	5	1.5kg



END ASSEMBLY BRACE KIT

BRACE KIT

Whites Rural End Assembly Brace Kit includes:

- Fireproof base plate heavy duty, hot-dipped galvanised
- Stay clamp 100NB, with Brace Cap 50NB, hot dipped galvanised
- Wire rope with eyebolt 3.6m, 6 x 19 strand galvanised steel wire, hot-dipped galvanised bolt
- Post Cap 100NB, galvanised

The box comes with 4 sets of brace kits.

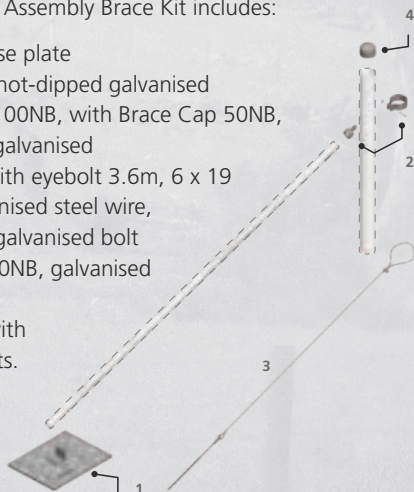

1. Fire-proof base plate



3. Wire rope with eyebolt



2. Stay clamp with brace cap



4. Galvanised post cap



Box of 4 Brace Kits



MURRAY

MURRAY[®] STIFF STAY[®]

Murray Stiff Stay prefabricated fencing is *exclusively made* on the world-renowned Stiff Stay machines producing a tight, smooth knot in multiple configurations to suit farming requirements across the country.

MURRAY[®] BARBED/BARBLESS WIRE

Murray Barbed Wire & Barbless Safe-Twist Wire is produced using the *latest and highest tolerance* barbed wire machines available today for a tight twist that adds strength and prevents barbs slipping. Supplied on hardwood timber spools.



Made in Australia
100% Australian Owned & Operated

**MURRAY**

HINGED JOINT

**WHITES[®]
RURAL**


FARM FENCING

Murray Hinged Joint prefabricated fencing is made at our Albury Manufacturing facility in regional Australia.

- 30cm picket spacings ideal for stock, boundary and internal fencing
- 15cm picket spacing for more intensive farming
- Galvanised to AS4534
- 2.50mm high tensile line wires and 2.50mm vertical stay wires

Also available in Heavily Galvanised to AS4534

Spacing Chart

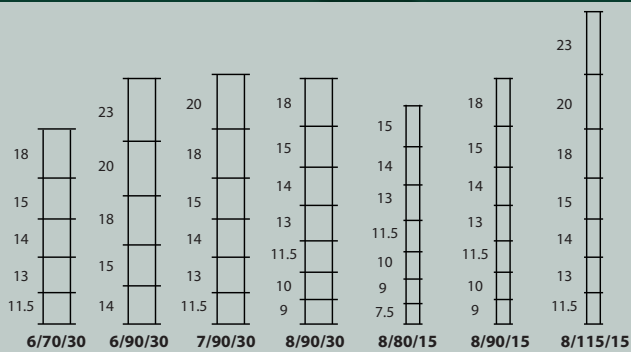

Scan
for more
information

Made in Australia

100% Australian Owned & Operated

Code	Product	Tensile Strength	Roll Length	Roll Weight	Pallet Qty	Galv. Coating	Line Wire
STANDARD GALVANISED HINGED JOINT							
10291	6/70/30	High	200m	70kg	9	Standard	2.5mm
10292	6/90/30	High	200m	74kg	9	Standard	2.5mm
10293	7/90/30	High	200m	83kg	9	Standard	2.5mm
10294	8/90/30	High	200m	92kg	9	Standard	2.5mm
10298	8/90/15	High	100m	61kg	9	Standard	2.5mm
10299	8/115/15	High	100m	69kg	9	Standard	2.5mm
HEAVY GALVANISED HINGED JOINT							
A0311	6/70/30	High	200m	76kg	9	Heavy	2.5mm
A0312	6/90/30	High	200m	81kg	9	Heavy	2.5mm
A0313	7/90/30	High	200m	90kg	9	Heavy	2.5mm
A0314	8/90/30	High	200m	99kg	9	Heavy	2.5mm
A0315	8/80/15	High	100m	63kg	9	Heavy	2.5mm
A0318	8/90/15	High	100m	67kg	9	Heavy	2.5mm
A0319	8/115/15	High	100m	74kg	9	Heavy	2.5mm



Code	Wire	Tensile Strength	Coil Length	Coil Weight	Sling Qty	Galv. Coating	Rec. Tension Breaking Strain
HEAVILY GALVANISED FENCE WIRE							
10014	2.50mm	Medium	1500m	58kg	10	Heavy	1.3kn, 3.7kn
10015	2.50mm	High	1500m	58kg	10	Heavy	1.8kn, 5.4kn
10016	2.80mm	High	1000m	48kg	10	Heavy	2.0kn, 6.8kn
10017	3.15mm	Soft	750m	46kg	10	Heavy	1.2kn, 3.0kn
10018	4.00mm	Soft	500m	50kg	10	Heavy	1.8kn, 4.8kn
STANDARD GALVANISED FENCE WIRE							
10161	4.00mm	Soft	500m	49kg	10	Standard	1.8kn, 4.8kn
10163	3.15mm	Soft	750m	46kg	10	Standard	1.2kn, 3.0kn
10170	2.50mm	Medium	1500m	58kg	10	Standard	1.3kn, 3.7kn
10171	2.50mm	High	1500m	58kg	10	Standard	1.8kn, 5.4kn
STANDARD GALVANISED TIE WIRE							
10164	2.50mm	Soft	1300m	50kg	10	Standard	1.3kn, 3.7kn
10165	2.00mm	Soft	2000m	50kg	10	Standard	-
10166	1.57mm	Soft	3200m	50kg	10	Standard	-



Code	Wire	Tensile Strength	Coil Length	Coil Weight	Sling Qty	Coating	Rec. Tension Breaking Strain
TRELLIS WIRE							
10022	2.00mm	High	2000m	44kg	10	Hvy Gal	1.0kn, 2.7kn
10023	2.65mm	High	1000m	44kg	10	Hvy Gal	2.0kn, 6.0kn
10024	2.85mm	High	1000m	50kg	10	Hvy Gal	2.2kn, 8.3kn
10026	3.15mm	High	1000m	61kg	10	Hvy Gal	3.1kn, 9.4kn

FENCE WIRE

FENCE WIRE

Murray Fence Wire is coiled at our Albury Manufacturing facility in regional Australia and available in four grades:

High Tensile Wire

- Suited to longer strains/fence runs and wider post spacings where strength is imperative
- Heavily galvanised, lasts four times longer than standard galvanised wire

Medium Tensile Wire

- Easier to handle than HT, ideal with prefab fencing
- Heavily galvanised, last four times longer than standard galvanised

Soft Tensile Wire

- Easiest to handle, cost effective
- More fire resistant than HT/MT wire – ideal for fire prone areas

Tie Wire

- Easiest to handle and tie, cost effective



Coiled for smooth,
tangle-free pay-off



Scan
for more
information

Coiled in Australia

100% Australian Owned & Operated

TRELLIS WIRE

Murray Trellis Wire is made at our Albury Manufacturing facility in regional Australia, using premium grade wire.

- Heavily galvanised to last up to 4 times longer
- Made with high tensile wire to the highest tolerance
- Smooth tangle-free delivery

Use with Agri-Wire Strainer – a traditional cam-lock style strainer used in vineyards.



Scan
for more
information

Made in Australia

100% Australian Owned & Operated

**MURRAY**

BARBED & BARBLESS WIRE

BARBED & BARBLESS WIRE

Murray Barbed and Barbless Safe-Twist Wire is made at our Albury Manufacturing facility in regional Australia.

High Tensile Barbed Wire

- Made from high tensile wire in a continuous length for added strength – no joins
- Reverse twist pattern absorbs heavy loads by 'unwinding' and 'rewinding' under stock pressure
- Barb spacing is consistent and close with limited movement
- Available in Heavily Galvanised 1.57mm, 1.80mm and 2.00mm HT wire
- Meets AS2423 Australian Standard

IOWA Barbed Wire


- Made from 2.50mm soft/low tensile wire in a continuous length - no joins
- Continuous twist pattern locks the barbs in place limiting movement with stock pressure
- Barb spacing is consistent and close with limited movement
- More fire resistant than high tensile – ideal for fire prone areas
- Softer wire is easier to work with than high tensile



Reverse Twist Style for optimum strength and tensioning



Continuous Twist Style



Continuous Length - No Joins



Coiled on hardwood spools

Barbless Safe-Twist Wire

- Made from 2 x 1.8mm high tensile, heavy galvanised wire in a continuous length - no joins
- Meets the critical farming needs of cattle and livestock containment
- Provides a safer environment for wildlife & endangered animals
- Installation is no different to traditional high tensile barbed wire and tension



Scan for more information

Made in Australia


100% Australian Owned & Operated

**WHITES[®] RURAL**

Code	Wire	Tensile Strength	Coil Length	Coil Weight	Pallet Qty	Galv. Coating	Rec. Tension Breaking Strain
HIGH TENSILE BARBED WIRE							
10100	2.00mm	High	500m	37kg	36	Heavy	1.6kn, 5.0kn
10101	1.80mm	High	500m	28kg	32	Heavy	1.3kn, 4.0kn
10102	1.57mm	High	500m	24kg	48	Heavy	1.3kn, 3.0kn
IOWA BARBED WIRE							
10150	2.50mm	Soft	400m	45kg	27	Standard	1.3kn, 3.0kn
10151	2.50mm	Soft	400m	45kg	27	Heavy	1.3kn, 3.0kn



BARBLESS SAFE-TWIST top and bottom wire

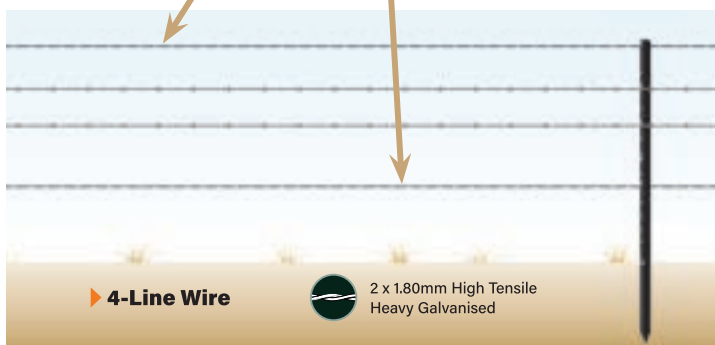

4-Line Wire



2 x 1.80mm High Tensile Heavy Galvanised

Code	Wire	Tensile Strength	Coil Length	Coil Weight	Pallet Qty	Galv. Coating	Rec. Tension Breaking Strain
HIGH TENSILE HG BARBLESS SAFE-TWIST WIRE							
10103	1.80mm	High	500m	21kg	32	Heavy	1.3kn, 4.0kn



Heavily Galv. Code (Weight)	Product	Roll Length	Tensile Strength	Pallet Qty
--------------------------------	---------	----------------	---------------------	---------------

STIFF STAY [®] FARM FENCING				
A0280 (64.5kg)	6/70/45	200m	High	9
10231 (72kg)	6/70/30	200m	High	9
A0261 (180kg)	6/70/30	500m	High	4
10232 (78kg)	6/90/30	200m	High	9
A0262 (195kg)	6/90/30	500m	High	4
10233 (86kg)	7/90/30	200m	High	9
10263 (215kg)	7/90/30	500m	High	4
10221 (31kg)	8/90/15	50m	High	9
10234 (94kg)	8/90/30	200m	High	9
A0265 (235kg)	8/90/30	500m	High	4
10262 (85.5kg)	11/142/15	100m	High	9

Standard Galv. Code (Weight)	Product	Roll Length	Tensile Strength	Pallet Qty
---------------------------------	---------	----------------	---------------------	---------------

STIFF STAY [®] FARM FENCING				
A0201 (68kg)	6/70/30	200m	High	9
A0202 (73kg)	6/90/30	200m	High	9
10203 (81kg)	7/90/30	200m	High	9
10223 (202kg)	7/90/30	500m	High	4
A0204 (89kg)	8/90/30	200m	High	9



Standard Galv. Code (Weight)	Product	Roll Length	Tensile Strength	Pallet Qty
---------------------------------	---------	----------------	---------------------	---------------

2.00mm STIFF STAY [®] FARM FENCING				
10226 (39.5kg)	8/90/15	100m	High	9
10225 (43.5kg)	8/115/15	100m	High	9
10228 (43.5kg)	10/90/5	50m	High	9
10229 (68kg)	12/115/10	100m	High	9
10227 (57kg)	13/122/5	50m	High	9

2.00mm/2.50mm STIFF STAY [®] FABRICATED FARM FENCING				
10222 (57kg)	13/90/15	100m	High	9
10224 (71kg) with Apron	13/90/15	100m	High	9
10290 (56kg) Wild Dog	13/115/15	100m	High	9




FARM FENCING

Murray Stiff Stay prefabricated fencing is made exclusively on the Stiff Stay machine at our Albury Manufacturing facility in regional Australia.

- Popular 30cm and 15cm picket spacings
- Heavily Galvanised to AS4534
- 2.80mm high tensile top and bottom wires for added strength (Heavy Galv only)
- 2.50mm high tensile line wires and 2.50mm vertical stay wires

Also available in Standard Galvanised to AS4534 with 2.50mm high tensile line wires and 2.50mm vertical stay wires

Spacing Chart

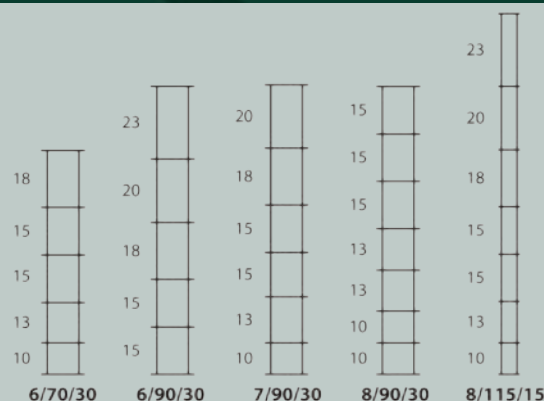

Continuous vertical pickets that are locked into place to resist buckling and sagging



Better over uneven terrain, resist sagging



Pre-stripped rolls for faster fencing – no need to strip picket wires; the first two pickets and the last two pickets are removed



Tension crimps provide a quick visual for judging tension



Scan
for more
information

Made in Australia
100% Australian Owned & Operated

**MURRAY****STIFF STAY®****WHITES[®]
RURAL**


EXCLUSION FENCING

Murray Stiff Stay prefabricated fencing is made exclusively on the Stiff Stay machine at our Albury Manufacturing facility in regional Australia.

- Narrow 15cm picket spacings
- Heavily Galvanised to AS4534
- 2.80mm high tensile top and bottom wires for added strength
- 2.50mm high tensile line wires and 2.50mm vertical stay wires

Optional pre-attached hinge apron to restrict penetration or digging under the fence

Spacing Chart

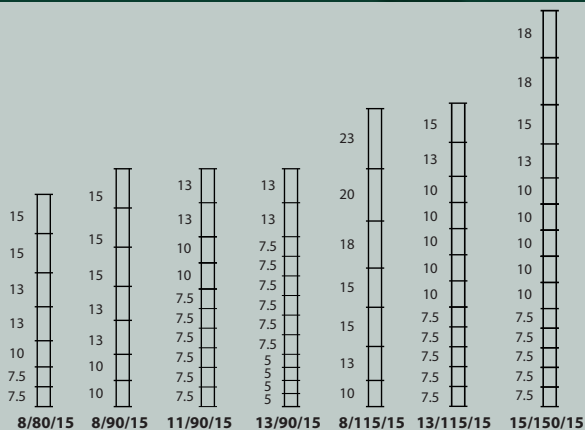

Heavily Galv. Code (Weight)	Product	Hinged Apron	Roll Length	Tensile Strength	Pallet Qty
STIFF STAY® EXCLUSION FENCING					
A0247 (29KG)	4/30/15	30cm	100m	High	18
10235 (62kg)	8/80/15		100m	High	9
10238 (63kg)	8/90/15		100m	High	9
A0267 (84kg)	8/90/15	30cm	100m	High	9
A0266 (156kg)	8/90/15		250m	High	4
A0414 (312kg)	8/90/15		500m	High	4
A0268 (209kg)	8/90/15	30cm	250m	High	4
A0415 (418kg)	8/90/15	30cm	500m	High	2
10289 (76kg)	11/90/15		100m	High	9
10285 (97kg)	11/90/15	30cm	100m	High	9
A0423 (223kg)	11/90/15	30cm	250m	High	4
10251 (86kg)	13/90/15		100m	High	9
10255 (106kg)	13/90/15	30cm	100m	High	9
A0439 (212kg)	13/90/15	30cm	250m	High	4
10239 (69kg)	8/115/15		100m	High	9
A0270 (90kg)	8/115/15	30cm	100m	High	9
A0269 (172kg)	8/115/15		250m	High	4
A0271 (225kg)	8/115/15	30cm	250m	High	4
A0421 (243kg)	11/90/15	30cm	250m	High	4
A0422 (486kg)	11/90/15	30cm	500m	High	2
A0390 (258kg)	11/115/15	30cm	250m	High	4
A0442 (265kg)	13/90/15	30cm	250m	High	4
10259 (92kg)	13/115/15		100m	High	9
A0273 (140kg)	13/115/15	30cm	100m	High	9
A0272 (228kg)	13/115/15		250m	High	4
A0274 (281kg)	13/115/15	30cm	250m	High	4
A0391 (118kg)	13/137/15	30cm	100m	High	9
10260 (118kg)	15/150/15		100m	High	9
A0276 (130kg)	15/150/15	30cm	100m	High	9
A0275 (273kg)	15/150/15		250m	High	4
A0277 (325kg)	15/150/15	30cm	250m	High	4
A0278 (651kg)	15/150/15	30cm	500m	High	1
A0395 (343kg)	16/160/15	30cm	250m	High	4
10254 (87kg)	19/183/15		60m	High	9



Scan
for more
information

Made in Australia

100% Australian Owned & Operated



Heavily Galv. Code (Weight)	Product	Roll Length	Tensile Strength	Pallet Qty
STIFF STAY[®] HORSE FENCING				
10264 (68kg)	10/90/5	50m	High	9
10256 (93kg)	13/122/5	50m	High	9
A0448 (110kg)	16/150/5	50m	High	9


MURRAY
STIFF STAY[®]


HORSE FENCING

Murray Stiff Stay prefabricated fencing is made exclusively on the Stiff Stay machine at our Albury Manufacturing facility in regional Australia.

- Super-tight 5cm picket spacings
- Heavily Galvanised to AS4534
- 2.80mm high tensile top and bottom wires for added strength
- 2.50mm high tensile line wires and 2.50mm vertical stay wires



Continuous vertical pickets that are locked into place to resist buckling and sagging




Better over uneven terrain, resist sagging



Pre-stripped rolls for faster fencing – no need to strip picket wires; the first two pickets and the last two pickets are removed



Tension crimps provide a quick visual for judging tension

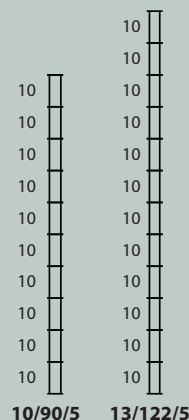

Scan
for more
information

Made in Australia
100% Australian Owned & Operated



TITAN RAIL



WHITES[®] RURAL

TITAN RAIL FENCING FEATURES



DIY INSTALLATION

So you're reasonably handy and would like to save money, then our composite fencing is easy to install.



LIFETIME WARRANTY

Think Fencing offers a limited 30 year warranty for all PVC Fencing products.



ECO FRIENDLY

Despite what you may think about plastics, the composite used to make our fences are in-fact eco friendly and completely recyclable.



UV RESISTANT

Titan Rail is made from durable high tech composites resistant to the harsh Australian sun. Meaning your fence will look great for years.



AUSTRALIAN MADE

All Think Fencing products are manufactured in Australia at the Bellarine-based manufacturing complex in Victoria.



ELECTROFIABLE


The Titan Rail Fence is designed to be electrofiable, a standard fencing energiser will work on Titan Rail.




*Titan Rail
Front Bracket
Black 10571
White 10561*



*Titan Rail
Top Bracket
Black 10575
White 10565*




*Titan Rail Internal
Corner Bracket
Black 10594
White 10589*




*Longranger Post
1.8m*
Black 10587
White 10557*


2.1m
Black 10586
White 10556*




*Titan Rail End
Bracket System
Black 10572
White 10562*




*Titan Rail
Line Strainer
Black 10579
White 10583*




*Titan Rail Stainless
Steel Joining Buckle
Black 10593
White 10559*

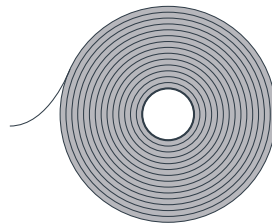


*Titan Rail Roll
100m
Black 10577
White 10567*



*Titan Rail Roll
200m*
Black 10578
White 10568*





*Longranger
Post Cap
Black 10588
White 10558*

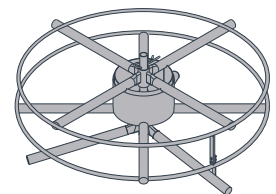


*Titan Rail
Spinner
Black 10599*



* Made to Order – Normal Lead Times Apply

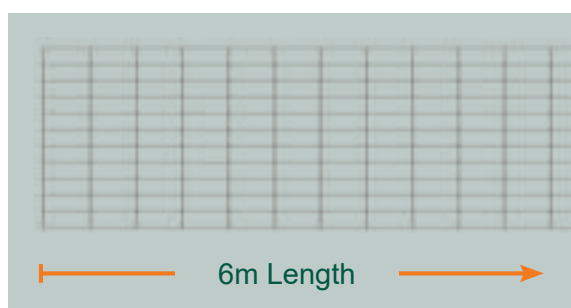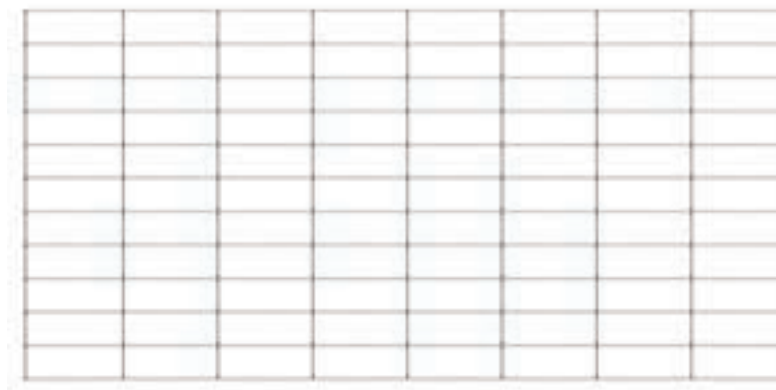

Code	Aperture (mm)	Width (mm)	Length (m)	Weight (kg)	Nom. Wire Dia. (mm)
SHEEP YARD MESH					
ASYM1	100 x 250	900mm	6m	12.7kg	5mm
ASYM2	100 x 250	1100mm	6m	15.3kg	5mm
ASYM3	100 x 200	900mm	6m	13.5kg	5mm
ASYM4	100 x 200	1100mm	6m	16.3kg	5mm
ASYM5	100 x 150	900mm	6m	14.9kg	5mm
ASYM6	100 x 150	1100mm	6m	18kg	5mm

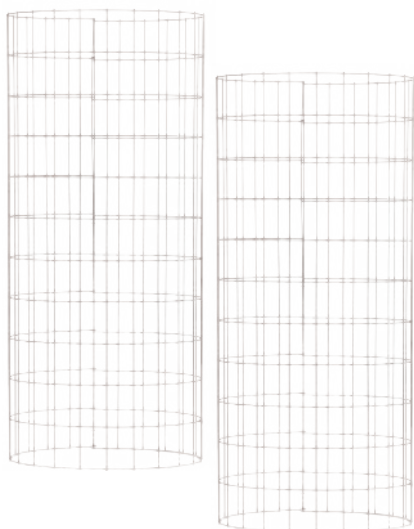

Code	Aperture (mm)	Diameter (mm)	Height (mm)	Length (mm)	Weight (kg)	Wire Dia. (mm)
TREE GUARD						
ATREE	160 x 100	750	1760	2400	11.2kg	5

WELDED MESH

SHEEP YARD MESH

Murray Sheep Yard Mesh is manufactured flush with the outside edge of the perimeter wires at our Albury Manufacturing facility in regional Australia and available in four grades.

Light: 900mm high - 9 x 5mm line wires with the top two vertical apertures set at 150mm and lower six 100mm. 4mm horizontal cross wires at 250mm aperture.

Medium: 5mm wire with vertical apertures at 100mm and horizontal apertures set at 250mm.

Also produced in a 5.6mm wire for special orders.

Heavy: 5mm wire with vertical apertures at 100mm and horizontal apertures set at 200mm.

Extra Heavy: 5mm wire with vertical apertures at 100mm and horizontal apertures set at 150mm.



Scan for more information

Made in Australia

100% Australian Owned & Operated

TREE GUARD

Pre-rolled tree guard

Murray Tree Guard is a heavy duty enclosure to protect young trees. Rolled before delivery and arriving ready for installation, it is manufactured at our Albury Manufacturing facility in regional Australia.

- Heavy duty enclosure
- Pre-rolled
- Protect young trees



Scan for more information

Made in Australia

100% Australian Owned & Operated



FARM GATES

TOP NOTCH™ "I" STAY GATES

Whites Rural Top Notch Gates are manufactured with embedded mesh that sits inside the gate. Along with end welds that are smooth and flush with the pipe, it makes for a stronger, safer and faster hanging gate.

Inbuilt Strength

Embedded wire mesh increases strength, improves durability.



Edge Protect

Safer for hands and livestock. No sharp edges!



Fast Fit

No need to cut wire mesh. Hinges fit fast!



- All pipe is a uniform 25NB
- 1145mm high, 2400-4800mm wide
- 5mm galvanised wire
- 200mm horizontal x 100mm vertical aperture
- Zinc-based coating completely covers pipe & welds
- Supplied with our "Shut the gate mate!" sign


Whites Rural Farm Gates are made to exacting standards from some of the best materials available, quality tested to ensure trouble-free fencing that is designed to last.

5 BAR FARM GATES

Whites Rural 5 Bar Farm Gates are made stronger for cattle and high pressure livestock situations, featuring horizontal hot-dipped galvanised pipe welded to the outer frame.

- All pipe is a uniform 25NB
- 1145mm high, 1000-4800mm wide
- Zinc-based coating completely covers pipe & welds


PEDESTRIAN GATE

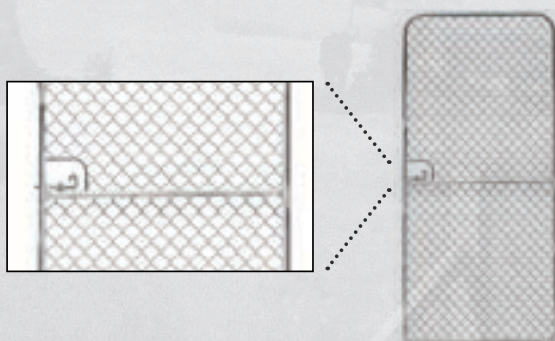

WR WHITES RURAL®
Shut the gate mate!

Nominal Size is the recommended gate opening

Code	Nominal mm (ft)	Actual (mm)	Stay Type	Weight (kg)	Weld Mesh (Nom. mm)
TOP NOTCH™ FARM GATES					
13122	875 (2'8")	825	-	8kg	200x100x5
13123	1075 (3'3")	1025	-	9kg	200x100x5
13124	1220 (4'0")	1170	-	10kg	200x100x5
13105	1525 (5'0")	1475	-	13kg	200x100x5
13106	1830 (6'0")	1780	-	14kg	200x100x5
13108	2440 (8'0")	2390	"I"	20kg	200x100x5
13110	3050 (10'0")	3000	"I"	22kg	200x100x5
13112	3660 (12'0")	3610	"I"	26kg	200x100x5
13114	4270 (14'0")	4220	"II"	31kg	200x100x5
13116	4880 (16'0")	4830	"II"	36kg	200x100x5

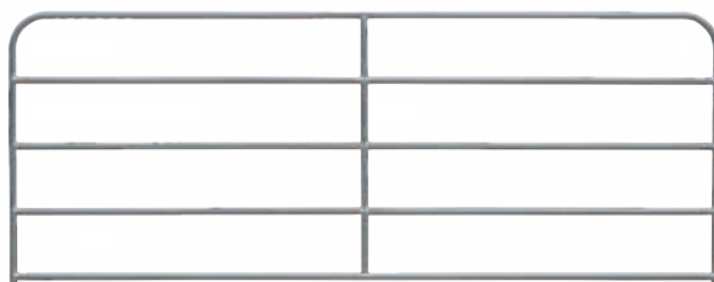

Nominal Size is the recommended gate opening

Code	Nominal mm (ft)	Actual (mm)	Stay Type	Weight (kg)	Pipe Mesh (Nom. mm)
5 BAR FARM GATES					
13204	1220 (4'0")	1170	-	13kg	25NB
13205	1525 (5'0")	1475	-	16kg	25NB
13206	1830 (6'0")	1780	-	18kg	25NB
13208	2440 (8'0")	2390	"I"	25kg	25NB
13210	3050 (10'0")	3000	"I"	29kg	25NB
13212	3660 (12'0")	3610	"I"	34kg	25NB
13214	4270 (14'0")	4220	"II"	41kg	25NB
13216	4880 (16'0")	4830	"II"	46kg	25NB

Code	Product	Weight (kg)
PEDESTRIAN GATE		
13100	6' x 3' (1800 x 900mm) Chain Mesh Gate	13.5kg

"N" STAY FARM GATES

Whites Rural "N" Stay Farm Gates feature a tighter mesh size for increased strength and protection. With a diagonal support brace running from the bottom to top corner, the range is available in left and right hand options.


- Variable mesh size for increased strength and protection
- Mesh apertures 190mm W, 45mm H (lower) and 90mm H (upper)
- All pipe is a uniform 25NB whilst Zinc-based coating completely covers pipe and welds
- Featuring collars for hanging and a diagonal support brace running from the bottom to top corner
- Available in left and right hand options (pack of 6 - 3L / 3R)



COLLARED FARM GATES


Whites Rural Collared Farm Gates recognise the specific needs of the WA rural market. A range of regular, "I" stay gates have been developed with a pre-fitted collar as distinctly used in Western Australia farming communities.

- All pipe is a uniform 25NB
- 1145mm high, 2400-4800mm wide
- 5mm galvanised wire
- 200mm horizontal x 100mm vertical aperture
- Zinc-based coating completely covers pipe & welds
- Supplied with our "Shut the gate mate!" sign

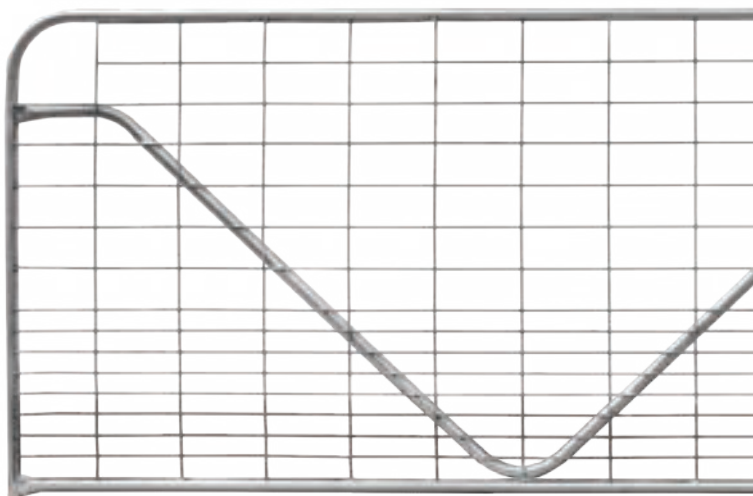

Nominal Size is the recommended gate opening

Code	Nominal mm (ft)	Stay Type	Weight (kg)	Weld Mesh (Nom. mm)
"N" STAY FARM GATES (GRADUATED)				
13310	3050 (10'0")	"N"	27kg	200x75x5
13312	3660 (12'0")	"N"	30kg	200x75x5
13314	4270 (14'0")	"N"	34kg	200x75x5
13316	4880 (16'0")	"N"	38kg	200x75x5

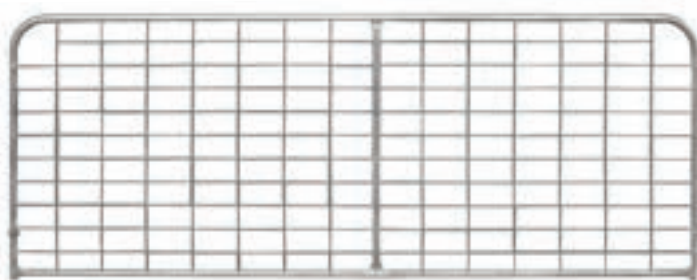

Code	Nominal mm (ft)	Actual (mm)	Stay Type	Weight (kg)	Weld Mesh (Nom. mm)
COLLARED "I" STAY FARM GATES (WA ONLY)					
13403	1075 (3'3")	1025	-	9kg	200x100x5
13404	1220 (4'0")	1170	-	10kg	200x100x5
13405	1525 (5'0")	1475	-	13kg	200x100x5
13406	1830 (6'0")	1780	-	14kg	200x100x5
13408	2440 (8'0")	2390	"I"	20kg	200x100x5
13410	3050 (10'0")	3000	"I"	22kg	200x100x5
13412	3660 (12'0")	3610	"I"	26kg	200x100x5
13414	4270 (14'0")	4220	"II"	31kg	200x100x5
13416	4880 (16'0")	4830	"II"	36kg	200x100x5

GATE FITTINGS

GATE FITTING SETS

A wide range of galvanised steel gate fitting sets, all the components included. Hang everything from small pedestrian gates to the largest farm gates.

Available in Drop Latch and Ring Latch:

FG1 General Purpose Pack

- Screw-in 12mm latch and catch (ring latch only)
- Top through-post strap 16mm x 300mm thread length including backing plate
- Screw-in bottom gudgeon

FG2 Economy Pack

- Screw-in 12mm latch and catch
- Top strap assembly
- Screw-in 20mm bottom gudgeon

FG4 Heavy Duty Long Pack

- Screw-in 12mm latch and catch
- Top through-post strap 16mm x 400mm thread length including backing plate
- Bottom through-post gudgeon 16mm x 400mm thread length (all nuts and washers included)

FG9 / FG9H (HDG) Heavy Duty Packs

- Screw-in 12mm latch and catch
- Top through-post strap 16mm x 300mm thread length including backing plate
- Bottom through-post gudgeon 16mm x 300mm thread length (all nuts and washers included)

FG12H (HDG) Drop-Hinge Pack

- Screw-in or weld-on low-profile latch
- Top through-post strap 16mm x 280mm thread length including backing plate
- Bottom through-post offset gudgeon 16mm x 280mm thread length (all nuts and curved washers included)


FG15 Multi-Fit Pack

- Screw-in 12mm latch and catch
- Top strap assembly
- Screw-in / weld-on bottom gudgeon


FG20 Collared Pack (WA only)

- Screw-in 12mm latch and catch
- Top and bottom through-post hinge assemblies 20mm x 400mm thread length with U-shaped hinge (all nuts and washers included)


Ring Latch

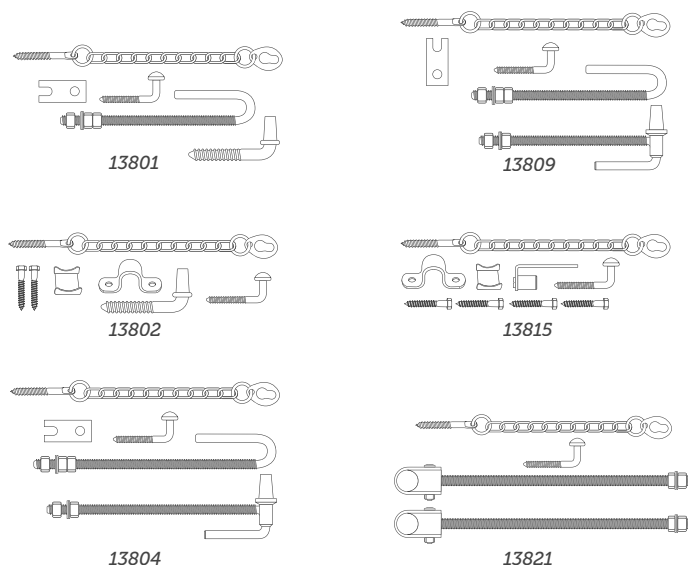

Drop Latch

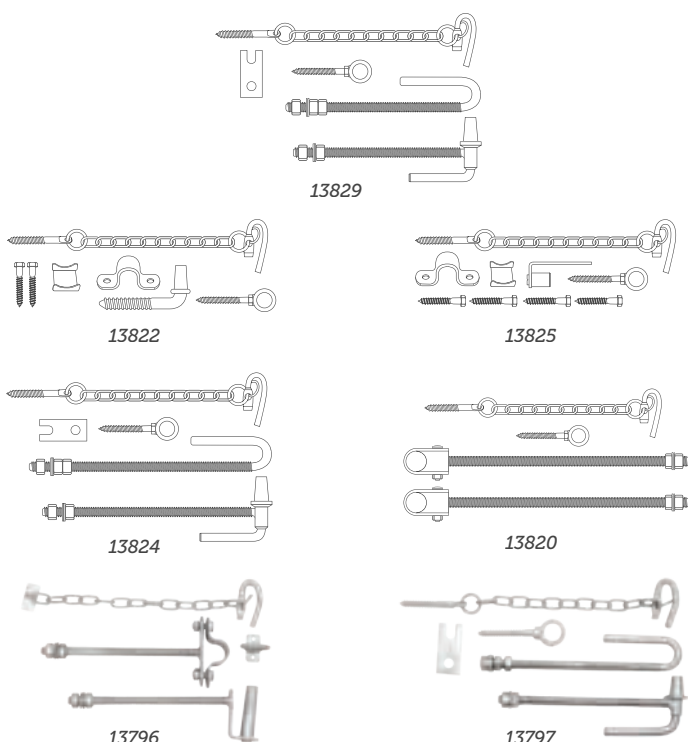

Ring Latch Code	Drop Latch Code	Product	Pack	Carton Qty	Weight (kg)
GATE FITTING SETS - RING LATCH & DROP LATCH					
13801	-	General Purpose Pack	FG1	5	1.9kg
13802	13822	Economy Pack	FG2	10	1.6kg
13804	13824	Heavy Duty Long Pack	FG4	5	2.6kg
13809	13829	Heavy Duty Pack	FG9	5	2.5kg
13815	13825	Multi-Fit Pack	FG15	10	1.3kg
13821	13820	Collared Gates (WA only)	FG20	5	2.6kg
	13796	HDG Drop-Hinge	FG12H	5	2.3kg
	13797	HDG Heavy Duty Pack	FG9H	5	2.4kg

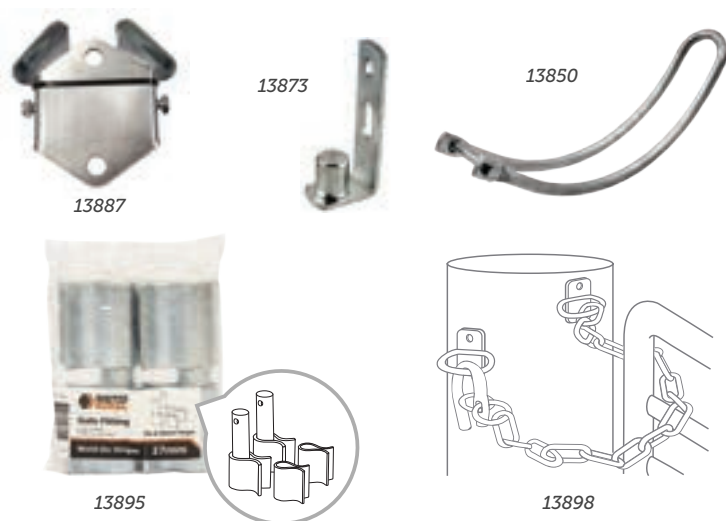

Code	Product	Type
INDIVIDUAL FITTINGS		
13830	Ring Latch & Catch	Screw
13833	Drop Latch & Eyelet	Screw
13862	Top Strap 25mm S3	Screw / Weld-on
13873	Gudgeon 25mm G13	Screw / Weld-on
13875	Gudgeon 25mm WG34	Weld-on
13895	Pins & Sleeves 27mm	Weld-on
13896	Pins & Sleeves 20mm	Weld-on
13897	Pins & Sleeves 16mm	Weld-on
13898	Drop Latch	Weld-on
13887	2-way Gate Latch	Screw / Weld-on
13794	Gudgeon + Hinge Set - Round Post	Screw
13795	Gudgeon + Hinge Set - Flat Post	Screw
GATE ANCHOR		
13778	Gate Anchor 475mm	Screw
DOUBLE GATE BOW		
13850	Double Gate Bow	Screw

INDIVIDUAL FITTINGS

Galvanised steel screw-in and weld-on gate fittings.

Latches

Screw-on available in drop and ring types.

Weld-on drop latch suitable for square or round posts.

Can be screw-fixed. Low profile safer for animals.

Strap and Gudgeon

Top strap screw-in type.

WG34 gudgeon weld-on type.

G13 gudgeon features long plate - weld-on or screw-in.

Pins and Sleeves

Featuring pin-lock hole for added peace of mind where needed. Simply weld into place.

Each packs contains 2 pairs (2 x pins and 2 x sleeves)

Double Gate Bow

Self-locating latch for double end gates. Suits 25NB gates.

SPECIALTY GATE FITTINGS

End Assembly Gate Fittings

Designed for the Stockpost Anchor Post, the fittings attach around the anchor post with no screwing or welding required.

Top strap & gudgeon pack to hinge the gate;
drop latch pack to lock the gate.


Bolt-on Double Gate Latch

Robust fitting suitable for securing 25NB double gates.

No need for screwing or welding; just position the latch on the gate frame and tighten the bolt to attach.

Pedestrian Gate Pack

Use with pedestrian gates, the pack features an easy access "D" latch and all the components.

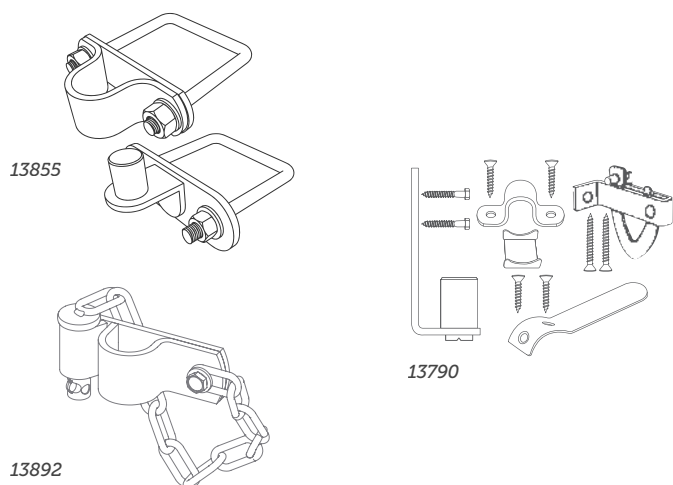

Code	Product	Carton Qty	Weight (kg)
SPECIALTY GATE FITTING SETS			
13855	End Assembly Top Strap & Gudgeon	5	1.5kg
13892	Bolt-on Double Gate Latch	20	0.7kg
13790	D-Latch Gate Fitting	20	0.7kg

HEAVY NETTING


RURAL NETTING

Whites Rural Heavy Netting is a versatile heavily galvanised netting for rural and heavy duty applications.

- Reverse twist construction
- Double selvedge wires for added strength
- Heavily galvanised

Netting with a 4cm aperture, 1.4mm wire diameter (often referred to as rabbit netting) & is available in varying heights. Suggested uses are:

- 30cm - reconditioning of existing fences, garden edging
- 60cm - reconditioning of existing fences, poultry
- 90cm - rabbit proofing, boundary fencing & tree guards
- 105cm - rabbit proofing, boundary fencing & tree guards
- 120cm - boundary and feral fencing, poultry
- 180cm - feral fencing, poultry and animal enclosures

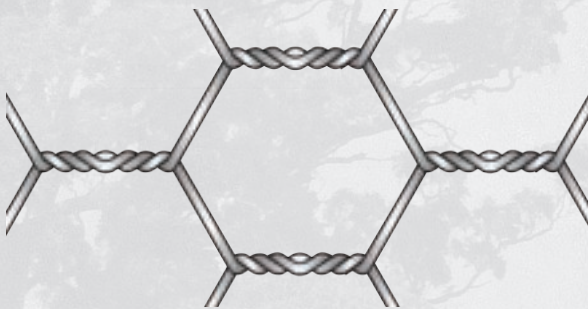

Code	Height	Aperture nom.	Wire Dia. nom.	Roll Length	Roll Weight	Pallet Qty	Galv. Coating
HEAVY NETTING							
10451	30cm	4cm	1.4mm	50m	13kg	48	Heavy
10452	60cm	4cm	1.4mm	50m	26kg	18	Heavy
10454	90cm	4cm	1.4mm	50m	36kg	9	Heavy
10474	90cm	4cm	1.4mm	100m	75kg	9	Heavy
10455	105cm	4cm	1.4mm	50m	42kg	9	Heavy
10475	105cm	4cm	1.4mm	100m	86kg	9	Heavy
10456	120cm	4cm	1.4mm	50m	48kg	9	Heavy
10458	180cm	4cm	1.4mm	50m	74kg	9	Heavy

BOUNDARY NETTING

Whites Rural Heavy Duty Boundary Netting has a 5cm aperture, 1.6mm wire diameter & is available in varying heights. Suggested uses are:

- 90cm - farm fencing, dogs & tree guards
- 120cm - feral fencing, animal enclosures & tree guards
- 180cm - feral fencing, animal enclosures & tennis courts



Code	Height	Aperture nom.	Wire Dia. nom.	Roll Length	Roll Weight	Pallet Qty	Galv. Coating
HEAVY NETTING - BOUNDARY							
10653	90cm	5cm	1.6mm	50m	37kg	9	Heavy
10655	120cm	5cm	1.6mm	50m	48kg	9	Heavy
10657	180cm	5cm	1.6mm	50m	71kg	9	Heavy

FARM MESH

FARM MESH HEAVY DUTY

Whites Rural Farm Mesh Heavy Duty is a 2.5mm general purpose welded mesh for heavy duty applications.

- Heavy welded construction
- Flush cut edges
- 2.5mm galvanised wire

Whites Rural Farm Mesh can be used for a variety of applications, including:

- Cages and animal enclosures
- Drainage grids
- Fencing and tree guards
- Trailer enclosures

FARM MESH HEAVY DUTY HEAVILY GALVANISED

A heavily galvanised version of the Whites Rural Farm Mesh Heavy Duty.

- Heavily galvanised to AS4534
- 75mm x 50mm aperture
- 2.5mm for heavy duty applications
- Heavy welded construction
- Flush cut edges



DOG MESH HEAVY DUTY

Whites Rural Dog Mesh Heavy Duty is an ideal fencing mesh to keep larger dogs and similar sized animals within a boundary, or out of garden beds and yards.

- Graduated mesh
- Heavy welded construction
- Flush cut edges
- 2.5mm galvanised wire

Line and picket wires have been strengthened for added rigidity. The graduated mesh is available in 120cm & 180cm heights, with smaller apertures at the base to fence puppies and smaller animals.



Code	Height (cm)	Aperture (mm)	Wire Diameter	Roll Length	Roll Weight	Pallet Qty	Galv. Coating
HEAVY DUTY FARM MESH							
21982	90	75 x 50	2.5mm	30m	34kg	9	Standard
21983	120	75 x 50	2.5mm	30m	46kg	9	Standard
21988	180	75 x 50	2.5mm	30m	69kg	9	Standard
21980	90	100 x 100	2.5mm	30m	22kg	16	Standard
21981	120	100 x 100	2.5mm	30m	29kg	16	Standard
21989	180	100 x 100	2.5mm	30m	43kg	9	Standard
HEAVY DUTY DOG MESH							
22004	120	Graduated	2.5mm	30m	23kg	16	Standard
22008	180	Graduated	2.5mm	30m	32kg	16	Standard

FENCING

HORSE SIGHT FENCE WIRE

Used as a top wire on horse fencing to increase visibility and prevent injury to horses.

- White PVC coating improves visibility
- Reduces damage to fences and injury to horses
- UV stabilised PVC coating



*5.2mm total diameter including PVC coating

Code	Wire	Tensile Strength	Coil Length	Coil Weight	Sling Qty	Galv. Coating	Rec. Tension Breaking Strain
HORSE SIGHT FENCE WIRE							
10169	5.2mm*	Soft	400m	43kg	5	Standard	2.0kn, 6.0kn

DROPPERS

Whites Rural Fence Droppers are manufactured from high grade steel and heavily galvanised to ensure long life. Use with barbed wire or plain wire.

- Manufactured from high tensile steel
- Heavily galvanised for long life
- Pack of 25 includes tool and clips



Code	Product	Sling Qty	Weight (each)	Coating
STEEL FENCE DROPPERS				
10511	81.5cm Droppers	25	9.4kg	Hot Dip Galvanised
10512	94cm Droppers	25	10.6kg	Hot Dip Galvanised
10514	107cm Droppers	25	12.2kg	Hot Dip Galvanised
10515	117cm Droppers	25	13.3kg	Hot Dip Galvanised
10516	Dropper Clips 500gm	-	-	-

FARMLITE™ HINGED JOINT

Farmlite Hinged Joint is a cost-effective solution for hobby farms and smaller rural properties. Made from 2.00mm standard galvanised wires.

Code	Product	Tensile Strength	Roll Length	Roll Weight	Pallet Qty	Galv. Coating	Line Wire
FARMLITE™ HINGED JOINT							
10281	8/90/15	Medium	100m	42kg	9	Standard	2.0mm
10282	8/115/15	Medium	100m	46kg	9	Standard	2.0mm
10272	8/115/15	Medium	50m	24kg	16	Standard	2.0mm

DRIVERS, LIFTERS & SPINNERS

CONTRACTOR GRADE

Contractor "Grip & Lift" Post Lifter

Robustly designed post lifter featuring parallel gripping surface with hardened steel grips. Heavy duty contractor grade construction.

- Hardened steel grips
- Suits most fence posts including Stockpost XL
- Galvanised steel; high tensile bolts

Contractor Post Drivers

Designed with reinforced handles and unique anti-shake handle to reduce vibrations transferred to the operator. Available in two sizes to suit standard posts and larger intermediate posts. Features include:

- Reinforced fully welded handles
- Balanced handles and head, reduces strain
- Anti-vibration collar

Three-Way Wire Spinner

Heavy Duty Three-Way Wire Spinner for smooth payout of plain & barbed wire. Zinc-plated, heavy duty steel construction. Made tough for Australian conditions.

Three different configurations make for an all-in-one tool to make fencing faster:

1. Fence Wire Spinner
Large diameter suits all fence wire types
2. Barbed Wire Spinner
Suitable for all types of barbed wire on reels
3. Mobile Hand-Cart
Turn unit on side for a mobile barbed wire hand-cart

STANDARD RANGE

Whites Rural Standard range of lifter, driver and wire spinner are an economical alternative to the contractor range, available in a durable zinc-plated finish.

Post Lifter

Heavy steel construction. Simply place post in jaw and use the lever action to easily remove steel posts.

Post Driver

Heavy steel construction, weighted balanced head.

Fence Wire Spinner

Central hub is designed for smooth, easy payout, and is adjustable to reduce spin and overrun for faster payout. Includes barbed wire attachment.



12207





12209



12212



12111




3.

Code	Product	Weight (kg)
CONTRACTOR GRADE - LIFTER, DRIVERS & WIRE SPINNER		
12209	Contractor Grade Heavy Duty Post Driver	9kg
12207	Contractor Grade 'Grip & Lift' Post Lifter	5.2kg
12212	XL Contractor Grade Heavy Duty Post Driver	10.5kg
12111	Three-Way Wire Spinner	18kg



12200

12201

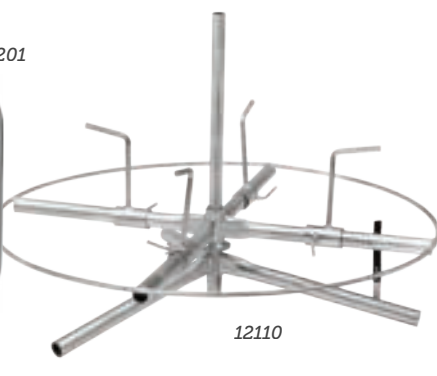

12110

Code	Product	Weight (kg)
STANDARD - LIFTER, DRIVER & WIRE SPINNER		
12200	Post Lifter	8.3kg
12201	800mm Post Driver	6.8kg
12110	Wire Spinner	11.5kg

STRAINERS & STRAINING TOOLS

FENCE & WIRE STRAINERS

Wire Chain Strainer

Whites Rural Contractor Chain Strainer is a proven design with hard wearing features, built tough to last. Ideal for straining fence wire, barbed wire and pre-fabricated fencing, it features:

- Swivel Jaw Attachment for use on either side of fence
- Removable Long Handle
- Heavy Duty Steel Rivets
- 1.8m Gold-Passivated Chain
- Smooth-Grip Jaws & Anchor Hook

Fabricated Farm Fencing Strainers

Whites Rural Contractor Fabricated Farm Fencing Strainer is used in conjunction with a chain strainer, it allows for easy straining and installation of fabricated farm fencing. Available in two sizes:

- 1.2m, 3 straining points, 4 pegs, ideal for most farm fencing
- 1.6m, 5 straining points, 6 wedged pegs, ideal for exclusion fencing

Agri-Wire Strainer

Whites Rural Agri-Wire Strainer is a specialised strainer for trellis wire in vineyards. Featuring a traditional cam-lock mechanism, the design makes it an easy and effective device for straining wire at the end of the trellis. Suitable for all high tensile wires up to 3.15mm and ideal for use with Murray™ Trellis Wire.


Permanent Wire Strainers

Whites Rural Strainers are available in galvanised, plastic insulated and porcelain insulated, and feature:

- Smooth ratchet action
- Releasable ratchet
- Long-life galvanised steel body
- High quality spring-locking clip
- Up to 4mm wire capability
- 16mm square drive or 8mm hex key for tightening (except 12099)



12302

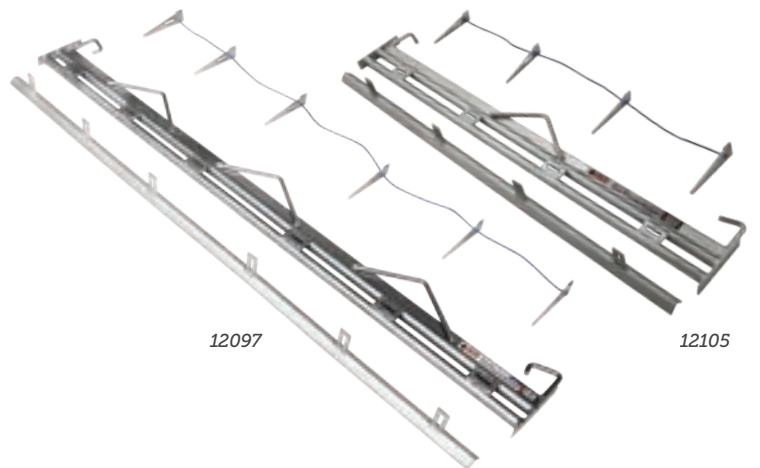

12097

12105

Code	Product	Weight (kg)
STRAINING TOOLS		
12302	Contractor Chain Strainer	3.8kg
12105	Contractor Fabricated Farm Fencing Strainer 1.2m	9.1kg
12097	Contractor Fabricated Farm Fencing Strainer 1.6m	13kg
12109	Replacement Wedge Pack (1.2m)	0.65kg



12106

12500

12501

Code	Product	Pack Qty
PERMANENT WIRE STRAINERS		
12106	Permanent Wire Strainer	25
12500	Insulated Perm. Wire Strainer - Plastic	20
12501	Insulated Perm. Wire Strainer - Porcelain	20
12099	Permanent Wire Strainer	25
12103	Handyman Permanent Wire Strainer	1
12090	Permanent Wire Strainer - Bucket	40
12104	Agri Wire Strainer	40

STAPLING



STOCKade[®] IMPULSE[®]

STOCKade Impulse power staplers combine faster fencing with hose-free portability in a gas cartridge gun.

ST400i Cordless Fence Post Staple Gun

- Portable – no need for compressors or air lines
- Efficient – fast, high output design drives up to 2 staples per second
- Reliable – Fuel Injection Technology delivers consistent power every time
- Fuel & Battery Indicator – never get caught short on the fence line
- Adjustable depth of drive for greater flexibility with staple placement
- V-Notch guide and wire guide to ensure correct staple placement and improved holding power



ST315i Cordless Dropper Fencing Stapler Gun

- Portable – no need for compressors or airlines
- Efficient – fast, high output design drives up to 2 staples per second
- Lightweight design for comfort during periods of high use
- Top Load Magazine for fast reloading to minimise down-time

V-Notch Guide ensures correct staple placement and improved holding power



ST400i ST315i and ST400 Staples

- Stockade staples are engineered for superior corrosion resistance and long lasting hold even in the world's toughest environments
- 90% Zinc, 10% Aluminium pre-galvanised 240gm heavy duty coat provides superior corrosion resistance
- Specified wire tensile strength and divergent point design enhances holding power
- Waterproof collation tape for all weather performance
- 4mm wire diameter to suit ST400i and ST400
- 3.15mm wire diameter to suit ST315i

Code	Product	Per Packet	Weight (kg)
STOCKade[®] IMPULSE[®] POWER STAPLING			
12455	STOCKade ST315i EVO Cordless Stapler		6.6kg
12441	STOCKade 33 x 3.15mm Impulse Barbed Staples	2000	6.7kg
12453	STOCKade 40 x 3.15mm Impulse Staples	2000	7.2kg
12454	STOCKade 50 x 4.0mm Barb Staples	1000	10kg
12445	STOCKade ST400i Impulse Power Stapler		4.2kg
12446	STOCKade 40 x 4.0mm Impulse Barbed Staples	1000	7.75kg
12448	STOCKade 50 x 4.0mm Impulse Barbed Staples	1000	10.2kg
12456	STOCK-ade EVO Barb Staple 33 x 3.15mm	1800	7.16kg
STOCKade[®] IMPULSE[®] FENCING ACCESSORIES			
12449	STOCK-ade EVO Impulse ST400i & ST315i Battery		0.85kg
12450	STOCK-ade EVO Impulse ST400i & ST315i Charger		0.2kg

STOCKade[®]
makes fencing

Exclusively distributed in Australia by Whites Rural

STAPLING

FENCING STAPLES

Galvanised double pointed "U" nail for securing wire to timber frames and posts. Plain or barbed staples for added holding power.

- Galvanised for maximum durability
- Razor sharp points for fast, easy driving
- Suitable for securing wire, mesh and netting

Available in hot-dipped galvanised for longer life.



Code	Product	Qty Per Packet	Weight (kg)	Carton Qty
GALVANISED STAPLES				
12503	50 x 4.0mm Barbed	50	500g	24
12509	40 x 4.0mm Barbed	52	500g	24
12513	30 x 4.0mm Barbed	65	500g	24
12416	25 x 3.15mm Plain	132	500g	24
12502	50 x 4.0mm Barbed	300	3kg	8
12506	40 x 4.0mm Barbed	315	3kg	8
12512	30 x 4.0mm Barbed	390	3kg	8
12412	25 x 3.15mm Plain	795	3kg	8
12517	50 x 4.0mm Barbed	1500	15kg	1
HOT-DIPPED GALVANISED STAPLES				
12504	50 x 4.0mm HDG Barbed	500	5kg	4
12505	50 x 4.0mm HDG Barbed	1500	15kg	1
12511	40 x 4.0mm HDG Barbed	1600	15kg	1

WOOL BALE FASTENERS

Super sharp, galvanised and pressed-cut to ensure the finest point. Penetrates fabric first time. Designed to be used in conjunction with Australian Wool Exchange (AWEX) standards.



Code	Product	Per Packet	Weight (kg)	Carton Qty
WOOL BALE FASTENERS				
12330	Wool Bale Fasteners	100	500g	24
12331	Wool Bale Fasteners	300	1.5kg	8
12334	Wool Bale Fasteners	700	3.5kg	4
12335	Wool Bale Fasteners		15kg	1



12308

12305



12300

12301

Code	Product	Per Packet	Weight (kg)
STOCKade® RINGFAST™ PNEUMATIC RING FASTENERS			
12308	STOCKade RINGfast Pneumatic Tool (bonus case)		1.5kg
12305	STOCKade RINGfast Ring Fasteners	1000	0.7kg
STOCKade® JAMBRO® RING FASTENERS			
12300	Jambro Ring Fastener Gun		0.4kg
12301	Jambro Standard Ring Fasteners	1000	1kg
12298	Jambro Magazine Slide		
12299	Jambro Plier Spring		

FASTENERS

STOCKade® RINGfast™

The RINGfast pneumatic ring fastening tool quickly and consistently secures ring fasteners.

Faster than manual tools, reliable and relatively effortless, the pneumatic operation produces consistent rings fast, reducing manual effort and improving productivity.

The tool has been designed with an ergonomic grip and is balanced for comfortable operation.

- Quickly and consistently secures ring fasteners
- Reduces manual effort, improves productivity
- Ergonomic and comfortable to operate
- Zinc-Aluminium coating for longer life



JAMBRO® RING FASTENER

Whites Rural exclusively distributes the Jambro Ring Fastener Gun and Clips in Australia. Fast and reliable, this manual gun will fasten to a rate of 25 metres per minute.

The stainless steel jaws and precision body casting ensure quick and easy loading and firing. Use with Jambro high tensile ring clips.

- Faster fencing, 25 metres per minute
- Stainless steel jaws
- High tensile ring fasteners
- Zinc-Aluminium coating for longer life

WIRE JOINERS & TENSIONERS

MAX ENGINEERING

Exclusively patented system, *MaxTensor's* all metal construction is designed for maximum quality, reliability and ease of use when joining and tensioning wire.

MAX Usability

Ergonomically designed for effortless practicality and long lasting performance, *MaxTensor* makes joining, straining and repairing fences easier.

MAX Reliability

With millions sold globally, *MaxTensor's* patented system is industry tested and proven against the best the world has to offer. Made in the EU to strict specifications.

Exclusively distributed throughout Australia & New Zealand by Whites Rural.



Barbed Wire - *MaxTensor*
Medium Joiner & Tensioner will fit up to 1.57mm barbed wire.



High Tensile Wire - *MaxTensor* is specially designed for wire with a high breaking strain.



Electric Fencing - *MaxTensor's* all metal construction means there is no break in the current.



Zinc Aluminium - *MaxTensor's* cam wedge provides a strong grip to hold Zn-Al coated wire.

All Metal Construction

Joiners & Tensioners for fencing wire, horticultural wire & fabricated fence



MaxTensor is a complete range of joiners, tensioners, end post terminators and tensioning tools



12157



12159



12160

12161



Code	Product	Per Packet	Carton Qty
MaxTensor® WIRE JOINERS & TENSIONERS			
12157	MaxTensor Medium Joiner - Blister Pack	20	6
12156	MaxTensor Medium Joiner - Contractor Pack	100	2
12155	MaxTensor Medium Joiner - Bulk Pack	250	-
12159	MaxTensor Large Joiner - Blister Pack	10	6
12158	MaxTensor Large Joiner - Bulk Pack	150	-
MaxTensor® TENSIONING TOOLS (WITH 5 BONUS MEDIUM JOINERS)			
12160	MaxTensor Polymer & Steel Core Tensioning Tool		
12161	MaxTensor Heavy Duty Steel Tensioning Tool - Contractor Grade		



50223


50224

50225

Code	Product	Length	Weight (kg)	Carton Qty
FARM PAK™ TIE WIRES				
50223	2.50mm Heavy Galvanised	80m	3kg	5
50224	2.00mm Heavy Galvanised	120m	3kg	5
50225	1.57mm Heavy Galvanised	200m	3kg	5



Code	Product	Per Packet	Weight (kg)	Carton Qty
FENCER'S TOOL				
12005	Fencer's Tool	-	0.1kg	-
FENCE POST CLIPS				
12319	Fence Post Clips (with tool)	250	1.4kg	8
HEAVILY GALVANISED PRE-CUT TIE WIRES				
71541	HG Pre-Cut Tie Wire 3.15mm x 300mm	approx 230	4kg	3
71543	HG Pre-Cut Tie Wire 2.50mm x 300mm	approx 340	4kg	3
HORSE-SAFE POST CAPS				
12348	Horse-Safe Post Caps	-	4.3kg	40
FENCE POST CAPS				
12322	Post Caps Yellow - 60mm	40	0.8kg	10
STAY PINS				
14340	Stay Pins Galvanised 10 x 300mm	50	9.5kg	

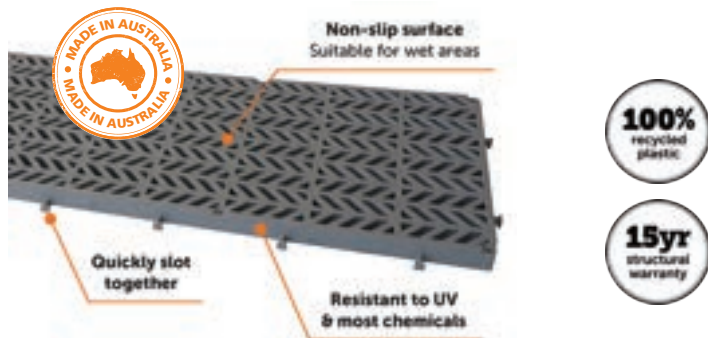

Code	Product	Weight (kg)
RIGI-FLOOR		
10193	RIGI-Floor 1200 x 400mm panel	4.1kg

ACCESSORIES

FARM PAK™ TIE WIRE

Whites Rural Farm Pak Tie Wires are wound onto a 'no tangle' dispenser pack for ease of use. The 3kg packs are light enough to carry, yet contain sufficient wire for most applications around the farm.

- Heavily galvanised wire
- 'No tangle' dispenser
- Easy to handle 3kg packs
- Soft, easy to tie



FENCING ACCESSORIES

Heavily Galvanised Pre-Cut Tie Wires

Easy to work with low tensile, pre-cut 300mm lengths. A great time-saver alternative to cutting longer coils to suit. Heavily galvanised & supplied in re-usable handy packs.

Horse-Safe Fence Post Caps

Hi-visibility and UV-resistant featuring three-slot pattern to hold 5mm hot wire and/or 12-40mm electric tape. White colour for horse safety. Suit standard 'Y' or larger intermediate posts.

Standard Post Caps

Unique Fin Grip™ system, snugly fits post with no need to tie down. With side holes for fence wire to pass through.

Stay Pins

Hot-dipped galvanised pre-cut 10mm rod lengths ideal for joining timber rails and posts. Long lasting, especially in CCA treated timbers. 300mm length for thicker timber and extra support.

Fencer's Tool

Makes tying off fence wire easy. Convenient pocket-size. For use with up to 4.00mm wire diameter.

Fence Post Clips

Fixes plain or barbed wire to steel fence posts. Easy to use, each pack includes an application tool.

RIGI-FLOOR™

For walkways, sheds, platforms & muddy areas

RIGI-Floor walkway panels are a long lasting, lightweight, low maintenance alternative to traditional materials used for walkway or platform construction.

Specifications:

- Material 100% recycled polypropylene copolymer
- Walkway Area 1200mm x 400mm. or approx. 2 panels per square metre
- Open Area Approx. 30%

PLIERS & CUTTERS

CONTRACTOR GRADE

Genuine Knipex® Quality

Knipex Professional Wire Cutting Plier made in Germany, from heat-treated Cr-V steel, with a tough cutting edge and a comfortable ergonomic design.



12001

Code	Product	Size	Weight (kg)	Carton Qty
PROFESSIONAL PLIERS & CUTTERS				
12001	Knipex Wire Cutter	200mm	0.4kg	20

STANDARD RANGE

Whites Rural Fencing Pliers

Whites Rural multi-use fencing pliers are strong, durable, and reliable to make fencing easy. Available in two styles:

Bullnose Pliers

- 3 wire cutters
- 2 different wire grips - suits any diameter

Parrot Beak Pliers

- Wire cutter, grips and hammer end
- Staple puller 'parrot beak'



12002

12003

12004

Code	Product	Size	Weight (kg)	Carton Qty
FENCING PLIERS				
12002	Fencing Plier - Parrot Beak	250mm	0.6kg	5
12003	Fencing Plier - Bullnose	250mm	0.6kg	5
12004	Fencing Plier - Bullnose	300mm	0.7kg	5



A family
owned
Australian
business

Whites Group Pty Ltd

ABN 25 001 845 478

SYDNEY
2B/201 Power St,
Glendenning,
NSW 2761

ALBURY
109 Boronia Rd,
Albury,
NSW 2640

BRISBANE
U4, 15 Seeana Pl,
Heathwood,
QLD 4110

MELBOURNE
25 Glasscocks Rd,
Dandenong South,
VIC 3175

PERTH
53 Collopy Rd,
Perth Airport,
WA 6105

ADELAIDE
18 Bradford Way,
Cavan,
SA 5094

Enquiries: 1300 559 732 Fax: 1300 559 762 Email: sales@whitesgroup.com.au
Specifications referred to in this publication are subject to change,
variation and/or improvement without notice.

For the most up-to-date details on all our rural products, visit our website at
www.whitesrural.com.au

© WHITES RURAL, STOCKPOST, UTE PACK, and STIFF STAY are registered trademarks of Whites Group Pty Ltd
™ MURRAY, TOP NOTCH, FARM PAK, FARMLITE, HANDYFENCE, FIN GRIP and RINGfast are trademarks of Whites Group Pty Ltd
© MaxTensor is a registered trademark of Shiny Works, S.L. © STOCK-ade, Impulse & Jambro are registered trademarks of Paslode Pty Limited
© Knipex is a registered trademark of KNIPEX-Werk C. Gustav Putsch KG © Bezinal is a registered trademark of NV Bekaert SA
© Famous Toledo Excellence By Design is a registered trademark of Tridon Australia Pty Ltd



Scan
to visit our
website